DATASHEET
rev. 01 - 09/03/2026

RA - opt

universal tear-proof flange


- cod. N11122001



TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA and recyclable PVC
- Outer flange hole cover
- High finish
- For holes from Ø 62 to Ø 74 mm
- Rear springs supplied
- Heat shrink barcode packaging
- Paintable with light-colored paints
- Operating temperature -20°C / +60°C


Tecnosystemi S.p.A. - Società Benefit | www.tecnosystemi.com
Plant 1: Via dell'Industria, 2/4 - Plant 2: via Caduti del Lavoro, 7 - Plant 3: via Caduti del Lavoro, 5
Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (Treviso) - Italy
Phone +39 0438 500 044 | Fax +39 0438 501 516 | **n. verde 800 904474 (only for Italy)**

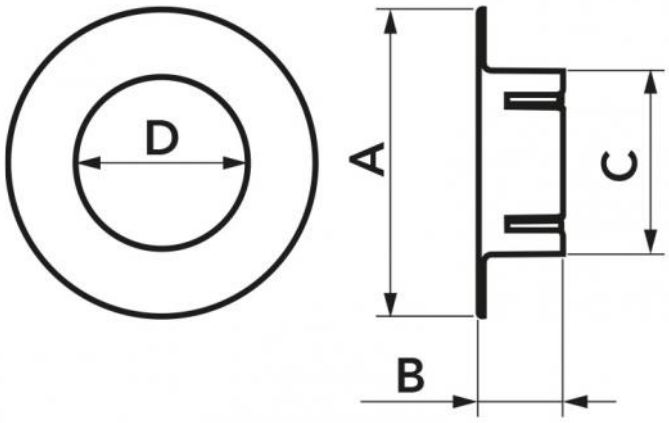

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	D [mm]
N11122001	100	26,5	62~74	57

EXAMPLE OF INSTALLATION:

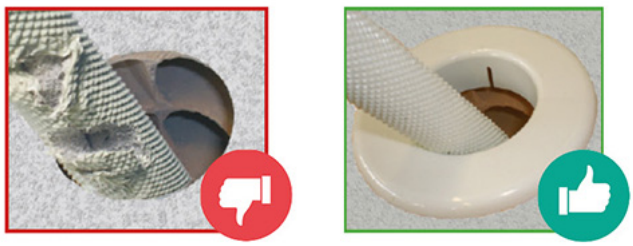

ITEMS

CODE	DESCRIPTION
N11122001	“RA” UNIVERSAL TEAR-PROOF FLANGE - WHITE - Ø 57 mm

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.